



www.zaymarinteriors.com

Follow us on social media

@Zaymarinteriors



**SPC FLOOR / LVT FLOOR
WATERPROOF LAMINATE FLOOR
MFB FLOOR / WALL PANEL**





Who We Are

Zaymar Interior design company in Nairobi Innovative Designs, Premium Materials, Great Quality



At Zaymar Interiors, we are passionate about transforming spaces into elegant, functional, and inspiring environments. As a premier interior design firm and supplier of high-quality interior decor materials in Kenya, we cater to homeowners, interior designers, real estate developers, and businesses looking to elevate their spaces with style and sophistication.

We are affordable interior designers in Kenya. With a keen eye for detail and a commitment to excellence, we bring creativity and innovation to every project, ensuring that each space reflects our client's unique vision and lifestyle



WHAT IS SPC FLOOR ?

SPC floor is mainly made with calcium powder , which is plasticized under high temperature to squeeze out sheets.Four-roll calendars are used to apply hot pack method to colored film decorative layer and wear-resistant layer , besides,production line of water-cooling UV spray coating paint is applied.SPC floor is 100% environmental protection floor without any hazardous substance , like heavy metal or formaldehyde .

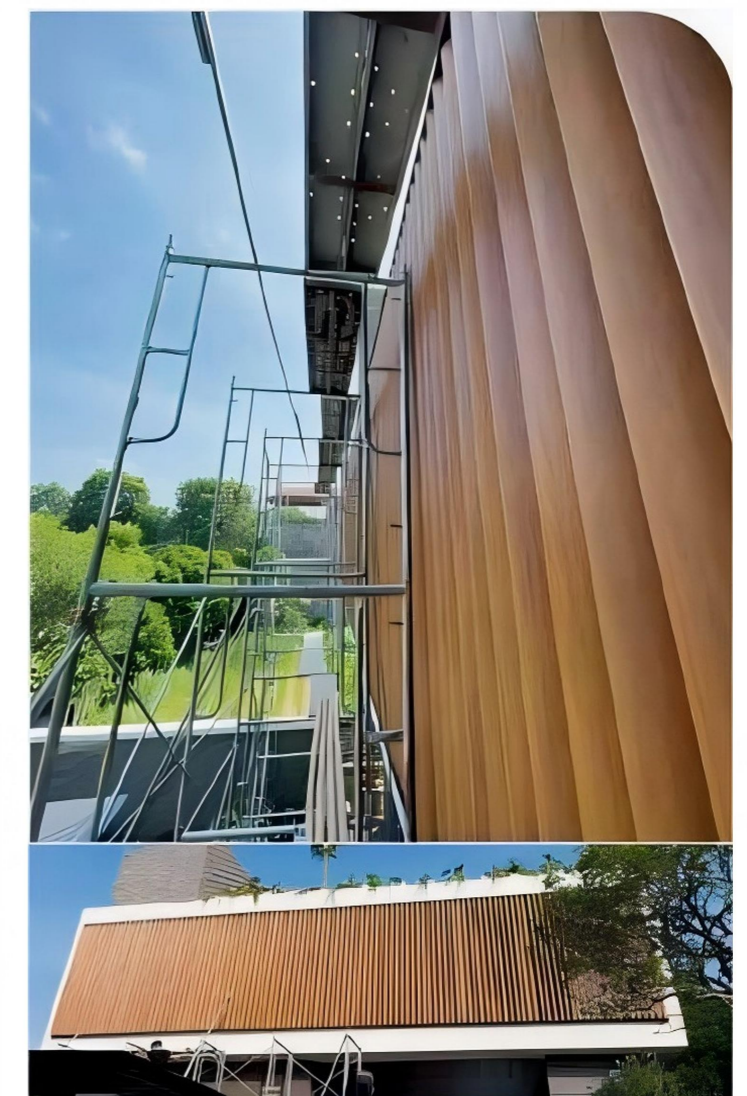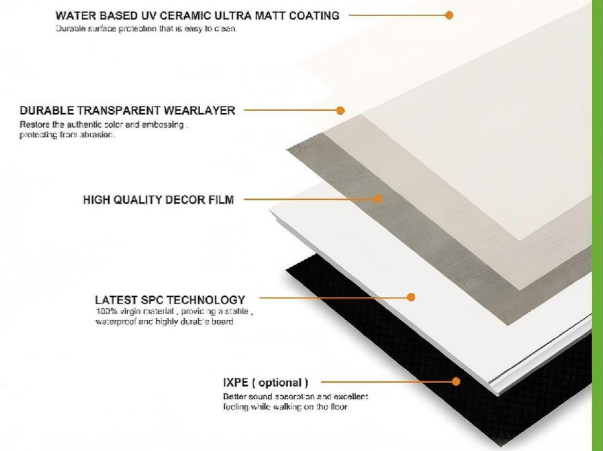

SPC FLOOR SURFACE & GROOVE

LENGTH: 1220, 1540, 1840MM
 WIDTH: 150, 180, 230MM
 THICKNESS: 4, 5, 6MM



BP SURFACE
 Painted V-groove




BP SURFACE
 Micro Bevel



EIR SURFACE
 Painted V-groove



EIR SURFACE
 Pressed U bevel

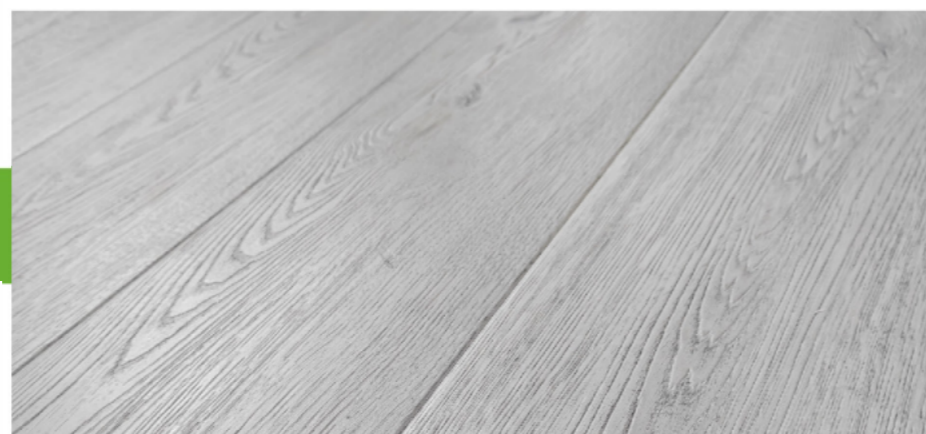

- WATERPROOF
- LOW MAINTENANCE
- ACOUSTICAL ATTRIBUTES
- DURABLE
- HYGIENIC
- PET FRIENDLY
- KID FRIENDLY

Natural Wood
 SPC EIR ZM7020 SERIES

LENGTH: 1220, 1540, 1840MM
 WIDTH: 150, 180, 230MM
 THICKNESS: 4, 5, 6MM



ZM7020-2

ZM7020-4


ZM7020-5

ZM7020-7

ZM7020-23

SPC EIR ZM369 SERIES


LENGTH: 220, 1540, 1840MM
 WIDTH: 150, 180, 230MM
 THICKNESS: 4, 5, 6MM

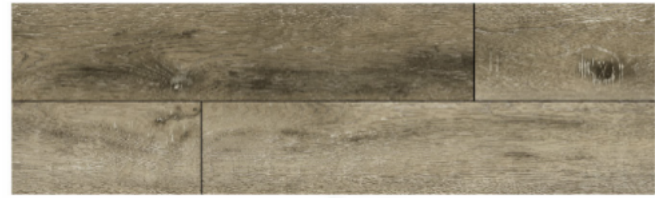


ZM369-1



ZM369-2

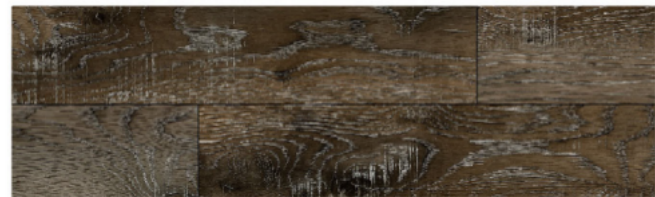

ZM369-6

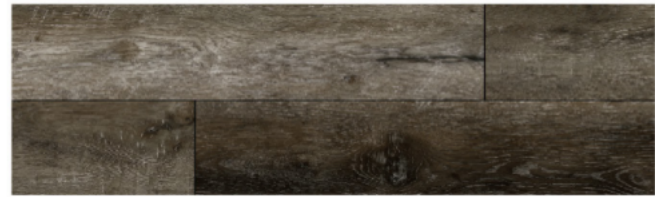


ZM369-7



ZM369-8



ZM369-15

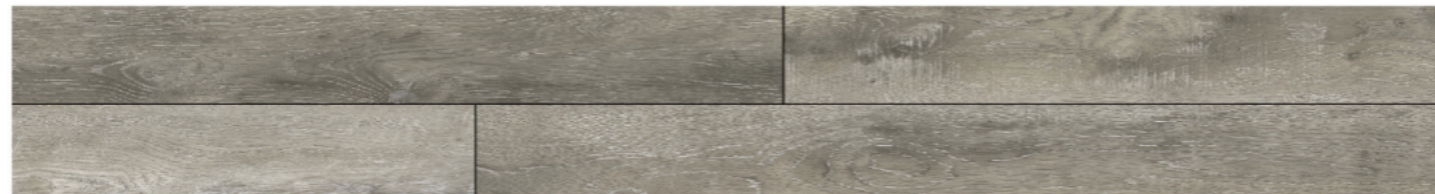

ZM369-28



SPC EIR ZM7017 SERIES


LENGTH: 1220, 1540, 1840MM
 WIDTH: 150, 180, 230MM
 THICKNESS: 4, 5, 6MM



ZM7017-1



ZM7017-2

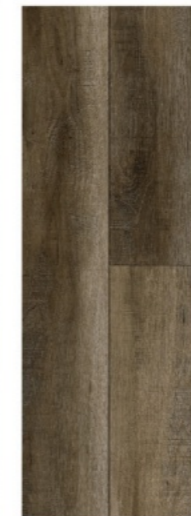

ZM7017-3



ZM7017-5



ZM7017-12




ZM7017-13




ZM7017-14




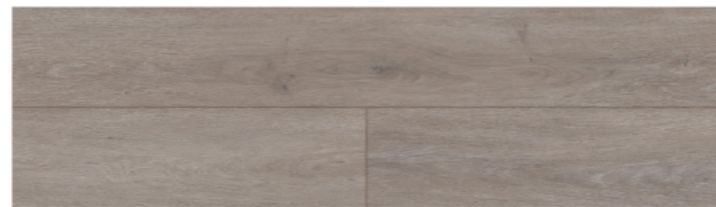


ZM8807-3

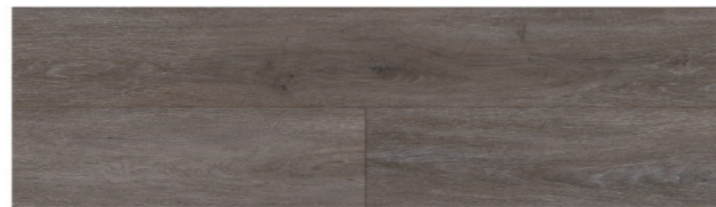

ZM8807-4

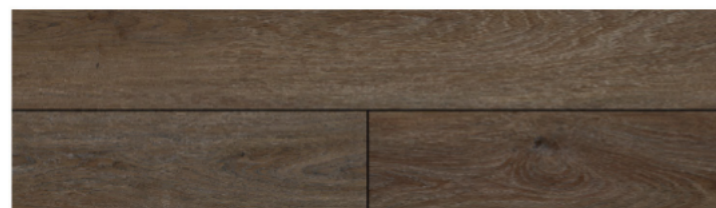

ZM8807-6

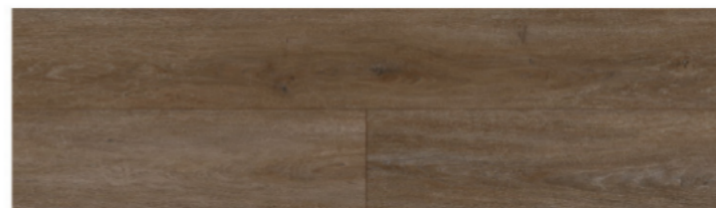

ZM8807-8



ZM8807-9



ZM8807-11

SPC EIR ZM8807 SERIES

LENGTH: 1220, 1540, 1840MM
WIDTH: 150, 180, 230MM
THICKNESS: 4, 5, 6MM



ZM671-02



ZM671-03



ZM671-03



ZM671-06



ZM671-08



ZM671-10



SPC EIR ZM671 SERIES

LENGTH: 1220, 1540, 1840MM
WIDTH: 150, 180, 230MM
THICKNESS: 4, 5, 6MM





ZM3844-4



ZM3844-5



ZM3844-8

SPC EIR 5023 SERIES

LENGTH: 1220, 1540, 1840MM
 WIDTH: 150, 180, 230MM
 THICKNESS: 4, 5, 6MM



ZM5023-2



ZM5023-3



ZM5023-4



ZM5023-5



ZM5023-8



ZM5023-10



SPC EIR 3844 SERIES

LENGTH: 1220, 1540, 1840MM
 WIDTH: 150, 180, 230MM
 THICKNESS: 4, 5, 6MM



ZM3844-14



ZM3844-15




ZM3844-17



SPC EIR ZM943 SERIES

LENGTH: 1220, 1540, 1840MM
 WIDTH: 150, 180, 230MM
 THICKNESS: 4, 5, 6MM

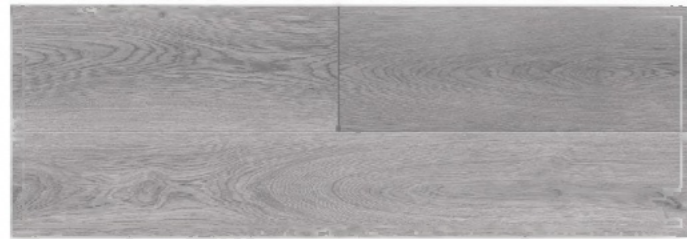

ZM943-1



ZM943-3



ZM943-6



ZM943-7



ZM943-15



ZM943-16

SPC EIR ZM180 SERIES

LENGTH: 1220, 1540, 1840MM
 WIDTH: 150, 180, 230MM
 THICKNESS: 4, 5, 6MM



ZM1801-2



ZM1801-3



ZM1801-7



ZM1801-8



ZM1801-9



ZM1801-11



SPC EIR ZM27101 SERIES

LENGTH: 1220, 1540, 1840MM
 WIDTH: 150, 180, 230MM
 THICKNESS: 4, 5, 6MM



ZM2101-3



ZM2101-4



ZM2101-7



ZM2101-13




ZM2101-15



ZM2101-16



ZM2101-17

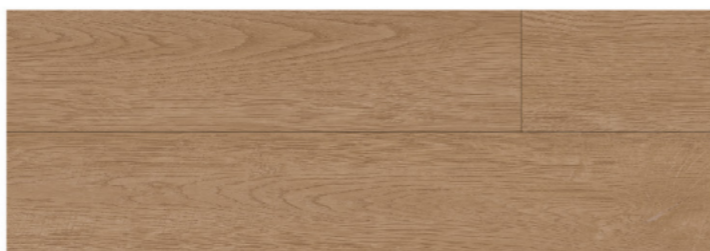

ZM2101-20



ZM7123-1



ZM7123-2



ZM7123-3

SPC EIR ZM7123 SERIES

LENGTH: 1220, 1540, 1840MM
 WIDTH: 150, 180, 230MM
 THICKNESS: 4, 5, 6MM



ZM7123-5



ZM7123-6



ZM7123-7



ZM7123-8



ZM7123-9



ZM7123-10



SPC EIR ZM9531 SERIES

LENGTH: 1220, 1540, 1840MM
 WIDTH: 150, 180, 230MM
 THICKNESS: 4, 5, 6MM




ZM9531-1



ZM9531-2



ZM9531-3

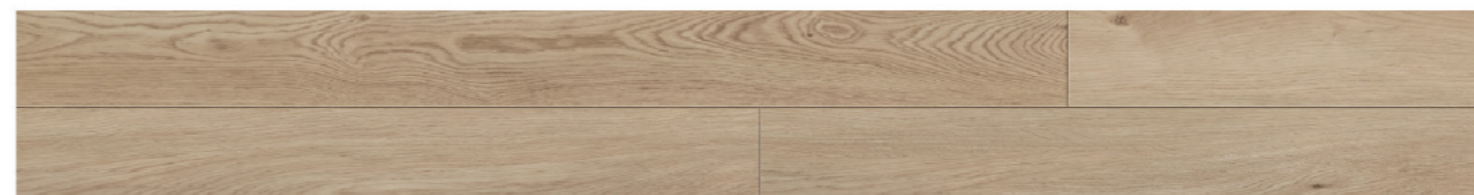

ZM9531-5




ZM9531-6



ZM9531-7

SPC EIR ZM8824 SERIES

LENGTH: 1220, 1540, 1840MM
 WIDTH: 150, 180, 230MM
 THICKNESS: 4, 5, 6MM

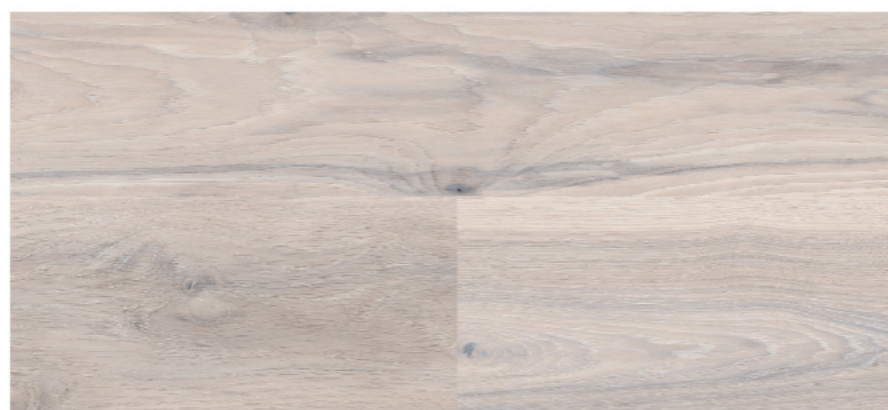

ZM8824-2



ZM8824-3



ZM8824-8



ZM8824-10





ZM3054-1



ZM3054-2



ZM3054-3




ZM3054-7



ZM3054-9

SPC EIR ZM3054 SERIES

LENGTH: 1220, 1540, 1840MM
WIDHH: 150, 180, 230MM
THICHNESS: 4, 5, 6MM

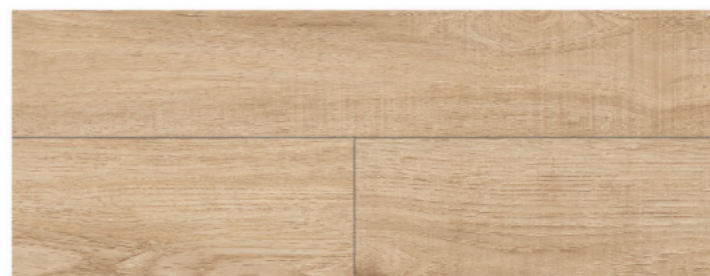

ZM3054-10



ZM3054-11



ZM1099-3



ZM244-1



ZM244-6



ZM8801-3




SPC STONE TLE COLLECTION


LENGTH: 610MM
WIDTH: 305MM
THICHNESS: 4, 5, 6MM



ZM1099-10

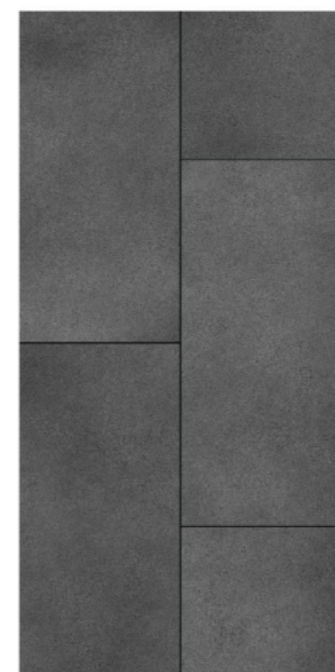

ZM2119-01

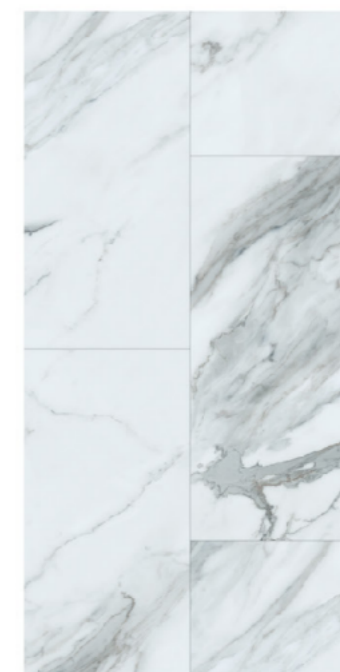

ZM124-1



ZM533-03



ZM6005

SPC HERRINGBONE COLLECTION

LENGTH: 625MM
WIDTH: 125MM
THICKNESS: 4,5,6MM



ZM6001



ZM6002



ZM6003



ZM6004

Loading Details

Specification (mm)	pcs/ctn	row/plt	layer/plt	ctn/pit	plt/ 20' GP	sqm/ctn	Wt./ctn (Kg)	N.W. 20'GP	G.W. 20'GP	Sqm 20'GP
1220*150*4mm	12	6	10	60	20	2.196	17.57	21081.60	21581.60	2635.20
1220*180*4mm	12	5	10	50	20	2.6352	21.08	21081.60	21581.60	2635.20
1540*180*4mm	10	5	15	75	12	2.772	22.18	19958.40	20458.40	2494.80
1540*230*4mm	10	3	12	36	20	3.542	28.34	20401.92	20901.92	2550.24
1540*230*4mm	8	3	15	45	20	2.8336	23.52	21166.99	21666.99	2550.24
1840*230*4mm	8	4	16	64	12	3.3856	27.08	20801.13	21301.13	2600.14
1840*230*4mm	8	4	15	60	12	3.3856	28.10	20232.35	20732.35	2437.63
1220*150*5mm	10	6	9	54	20	1.83	18.30	19764.00	20264.00	1976.40
1220*150*5mm	8	6	9	54	20	1.464	15.08	16285.54	16785.54	1581.12
1220*180*5mm	10	5	9	45	20	2.196	21.96	19764.00	20264.00	1976.40
1220*180*5mm	8	5	11	55	20	1.7568	18.10	19904.54	20404.54	1932.48
1540*180*5mm	8	5	15	75	12	2.2176	22.18	19958.40	20458.40	1995.84
1540*180*5mm	8	5	14	70	12	2.2176	22.84	19186.68	19686.68	1862.78
1540*230*5mm	8	3	12	36	20	2.8336	28.34	20401.92	20901.92	2040.19
1540*230*5mm	8	3	11	33	20	2.8336	29.19	19262.81	19762.81	1870.18
1840*230*5mm	6	4	16	64	12	2.5392	25.39	19501.06	20001.06	1950.11
1840*230*5mm	6	4	16	64	12	2.5392	26.15	20086.09	20586.09	1950.11
625*125*5mm	20	6	11	66	20	1.5625	16.72	22068.75	22668.75	2062.5
610*305*5mm	10	6	10	54	20	1.8605	19.91	21499.938	22099.938	2009.34

Technical Specifications

Characteristics	Standards	Result
Wear resistance	NALFALF 01-2011	IP-4000 cycles
Abrasion loss	EN-660-2	0.015 CLASS T
PCP	FD CEN/TR 14823:2006	NOT DETECTED
Colour fastness to light	EN ISO 105 B02	6
Slip Resistance	EN14041	R10
Fire Resistance	EN14041	Bf1-S1
Phthalate Test	ASTM D3421	NOT DETECTED
ROHS	2011/65/EU	NOT DETECTED
Staining Resistance	EN423	NOT AFFTECTED
Determination of dimensional stability	ASTM F2199-09	WIDTH 0.02 % LENGTH 0.04%
Squareness	ASTM F2055	SHORT 0.03mm, LENGTH 0.09mm
Peel Strength	EN431	0.3MM,>58N,0.5MM,>70N
Effect of a castor chair	EN425	NO VISIBLE DAMAGE
VOC emission	DIN EN ISO 16000-9	PASS
Residual indentation	ASTM F1914	0.40%
Resistant to Chemicals	ASTM F925	NO CHANGE
Resistant to heat	ASTM F1514	0.49 AE*
Resistant to light	ASTM F1515	0.87 ΔE*
Static coefficient of friction	ASTM C1028	DRY 0.94 ,WET 0.68
Static load resistant	ASTM F970	0.04 mm
Thermal Conductivity	ASTM C518	0.163 w/m-k
Thermal Resistance	ASTM C518	0.033 (m2-k)/w

Underlayer For Installation of Floors



Description
High density EVA with embossed film (waffle)
Main Raw Material
Ethylene-vinyl acetate copolymer
Package
Nude/Pallet
Benefits
For soundproof
Protect the flooring from moisture arising from concrete
Water absorption 0.003lb/ft³
Provides firmness and comfort underfoot

Thickness	1.0/1.5/2.0mm	Roll Size	200 SF/18.6 SQM
Density	110 kg/m ³	Roll Size	100 SF/9.3 SQM
Length	8.5/16.91meters	STC Rating	72 db
Width	1.1meters	IIC Rating	73 db



Description
High density IXPE with embossed film (waffle)
Main Raw Material
Chemical crosslinked polyethylene foam
Package
Nude/Pallet
Benefits
For soundproof
Protect the flooring from moisture arising from concrete
Water absorption 0.003lb/ft³
Provides firmness and comfort underfoot

Thickness	1.0/1.5/2.0mm	Roll Size	200 SF/18.6 SQM
Density	50 kg/m ³	Roll Size	100 SF/9.3 SQM
Length	8.5/16.91meters	STC Rating	72 db
Width	1.1meters	IIC Rating	73 db



Description
EPE Foam
Main Raw Material
Polyethylene
Package
Nude/Pallet
Benefits
The standard in sound and moisture protection
Self-levelling
Easy to install with attached overlapping lip and tape

Thickness	1.0/1.5/2.0mm	Roll Size	200 SF/18.6 SQM
Density	25 kg/m ³	Roll Size	100 SF/9.3 SQM
Length	8.5/16.91meters	STC Rating	44 db
Width	1.1meters	IIC Rating	48 db




Description
EVA
Main Raw Material
Ethylene-vinyl acetate copolymer
Package
Nude/Pallet
Benefits
For soundproof
Protect the flooring from moisture arising from concrete
Water absorption 0.003lb/ft³
Provides firmness and comfort underfoot

Thickness	1.0/1.5/2.0mm	Roll Size	200 SF/18.6 SQM
Density	110 kg/m ³	Roll Size	100 SF/9.3 SQM
Length	8.5/16.91meters	STC Rating	66 db
Width	1.1 meters	IIC Rating	72 db

Molding & Trims

- Matching for SPC/LVT/WPC flooring thickness 4mm-7.5mm

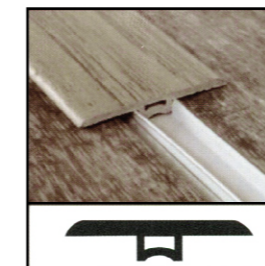


T-MOLDING

Size:2400*45*7mm

Packing:20pcs/box

Weight: 14kgs/box

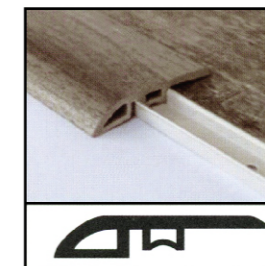

REDUCER

Size: 2400*43*7mm

Packing: 20pcs/box

Weight: 16kgs/box




END-CAP

Size:2400*35*7mm

Packing: 20pcs/box

Weight: 12kgs/box

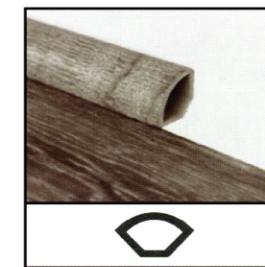


QUARTER ROUND

Size: 2400*28*16mm

Packing: 25pcs/box

Weight: 18kgs/box

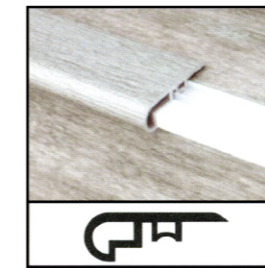


STAIR NOSE

Size: 2400*55*18mm

Packing: 10pcs/box

Weight: 11kgs/box

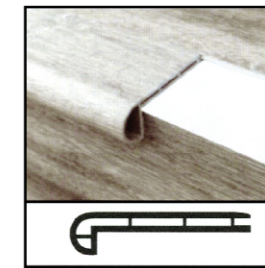


FLUSH STAIR NOSE

Size:2400*72*25mm

Packing: 10pcs/box

Weight: 25kgs/box

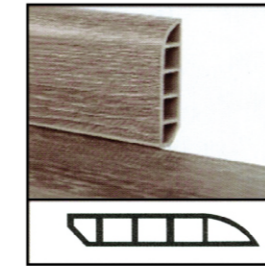


SKIRTING 60

Size: 2400*60*12mm

Packing: 10pcs/box

Weight: 16.5kgs/box

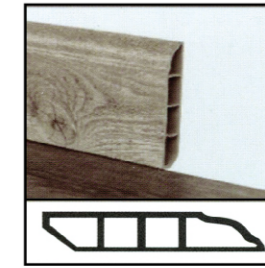


SKIRTING 80

Size: 2400*80*12mm

Packing: 10pcs/box

Weight: 18.5kgs/box

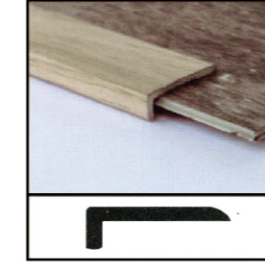


7 END CAP

Size: 2400*25*7mm

Packing: 50pcs/box

Weight: 10kgs/box

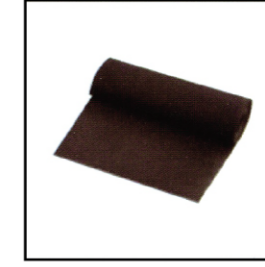


UNDERLAYMENT

Size: 16.9m*1.1m*1.5mm


Packing: 1 roll/bag




Weight: 4.5kgs/roll

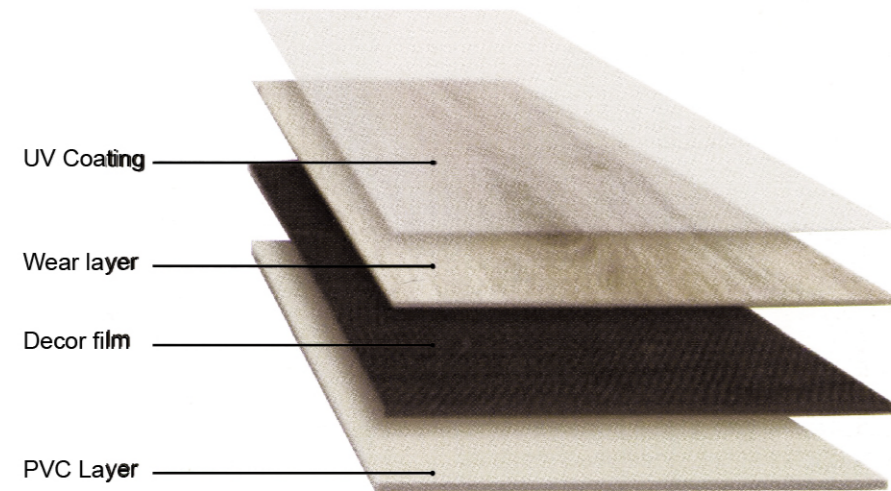Dry Back Flooring(glue down)

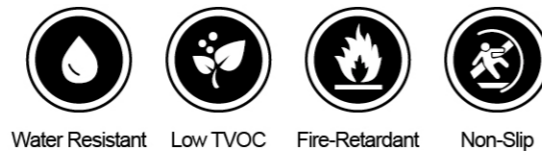

Sustainable
commercial
Flexible
Economical
Thin thickness
No mess installation



Size	Dry Back	Length from 590 to 1219.2mm Width from 118to 914.4mm
Thickness	Dry Back	From 1.5mm to 5mm
UV Option		Ceramic Coating Diamond Coating
Wear Layer		0.15/0.30/0.50 mm
IXPE		1.0/1.5/2.0mm
Surface Treatment		Wood Emboss,EIR, Crystal,Granite
Edge Treatment		  

WATERPROOF LAMINATE FLOOR

*Resists water Ends Worries,
New Tech. for Laminate*



WATERPROOF LAMINATE FLOORING

Waterproof Wood Fiber Floor




Our Advantage

- 100% Organic Core Board
- 100% Waterproof Flooring
- 3.5%-10% Thickness Swell

As years of research and development have been done, we are proud to tell that DITAI floor innovates a brand-new product that represents a new generation of flooring. Waterproof laminate flooring goes beyond the current flooring that it preserves the natural appearance of the wood floor, and improves the ability of waterproof.

Structure

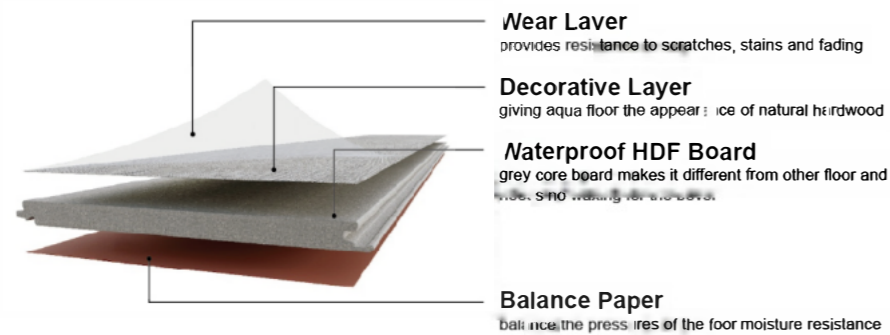

Features:

- Real Wood liked Surface
- Lifeproof Flooring
- Extreme Stability
- Abrasion Resistance
- Fire Protection
- Super Water Resistant
- Slip Resistant
- Easy for Installat on(click)
- Formaldehyde Free

Why Choose WATERPROOF LAMINATE FLOORING?



Organic Core Board

WATERPROOF LAMINATE flooring has succeeded in innovatory improvement that completely stops using plasticizers and PVC through the process of producing. The 100% organic floor makes degradation and recycling of the floor possible.



Waterproof Technology

The characteristic of 100% waterproof resists pet strains, including urine, feces, and vomit, making your house a pleasant home for your pets.



Warranty

A 25-year residential and 5 year commercial warranty is guaranteed for stain resistance, abrasion resistance and other properties.



Suitable for Laminate flooring

EIR ZM23001 SERIES

LENGTH: 1515MM
WIDTH: 197, 238MM
THICKNESS: 8, 10, 12MM



ZM23001-3



ZM23001-4



ZM23001-5



ZM23001-6



ZM23001-7



ZM23001-14



Suitable for Laminate flooring
EIR ZM23003 SERIES

LENGTH: 1515MM
 WIDTH: 197, 238MM
 THICKNESS: 8, 10, 12MM



ZM23003-2



ZM23003-3



ZM23003-4



ZM23003-5



ZM23003-7



ZM23003-8



ZM23002-2



ZM23002-3

Suitable for Laminate flooring
EIR ZM23002 SERIES

LENGTH: 1515MM
 WIDTH: 197, 238MM
 THICKNESS: 8, 10, 12MM



ZM23002-5



ZM23002-6



ZM23002-11



ZM23002-14





23004-1

Suitable for Laminate flooring
EIR ZM23008 SERIES

LENGTH: 1515MM
WIDTH: 197, 238MM
THICKNESS: 8, 10, 12MM



ZM23008-1



ZM23008-2

Suitable for Laminate flooring
EIR ZM23004 SERIES

LENGTH: 1515MM
WIDTH: 197, 238MM
THICKNESS: 8, 10, 12MM



ZM23004-2



ZM23004-3



ZM23004.4



ZM23004.5



ZM23004-9



ZM23008.3



ZM23008-4



ZM23008-5



ZM23008-6



ZM23008-7



ZM23008-8

Suitable for Laminete flooring

EIR 51507 SERIES

LENGTH:1515MM
WIDTH:197,238MM
THICKNESS:8, 10, 12MM



ZM51507-1




ZM51507-2



ZM51507-4



ZM51507-5

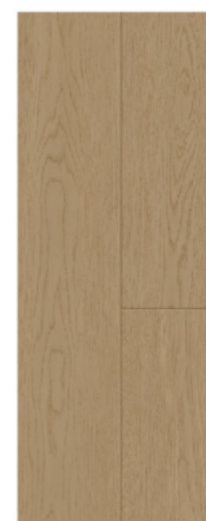

ZM51507-8



ZM51507-10



ZM51507-11



ZM51507-15



ZM81181-1



ZM81181-3



ZM81181-5



ZM81181-6



ZM81181-7



ZM81181-9

Suitable for Laminate flooring/MFB floor

EIR ZM81181 SERIES

LENGTH:1217MM
WIDTH:197,238MM
THICKNESS:8,10,12MM



ZM81181-10



ZM81181-11





Suitable for Laminate flooring/MFB floor

EIR ZM81188 SERIES


LENGTH:1217MM
WIDTH:197,238MM
THICHNESS:8,10,12MM




ZM81188-2



ZM81188-3

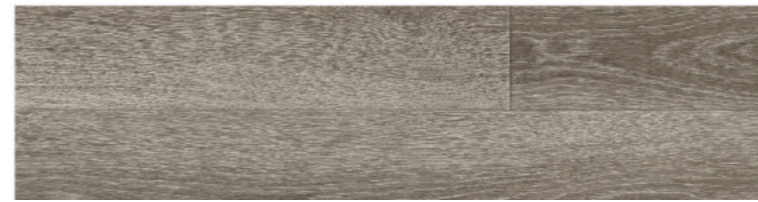

ZM81188-5

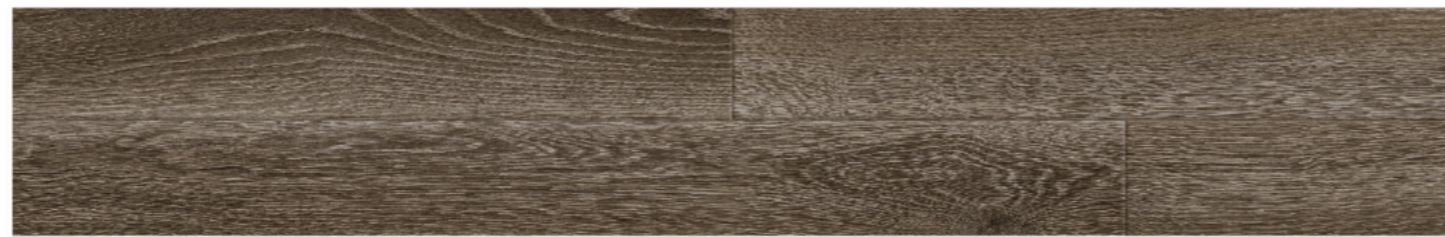

ZM81188-6




ZM81188-8



ZM81188-9



ZM81188-10

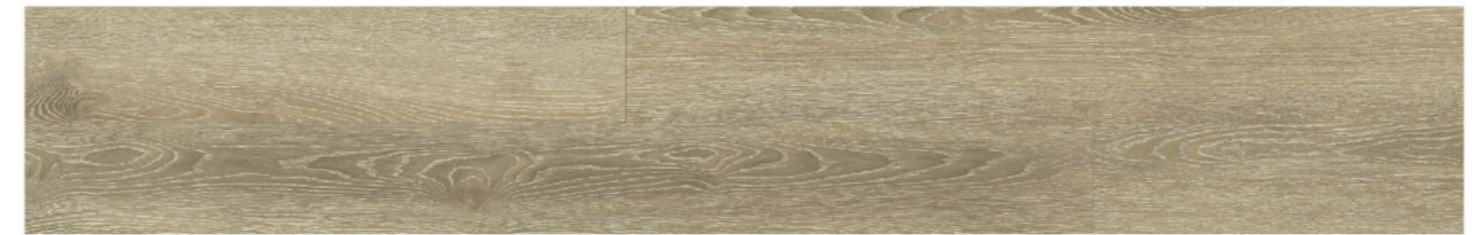

ZM24053-1



ZM24053-2

Suitable for Laminate flooring/MFB floor
ER ZM24053 SERIES

LENGTH:1217MM
WIDTH:197,238MM
THICHNESS:8,10,12MM



ZM24053-3



ZM24053-4



ZM24053-5



ZM24053-6



ZM24054-1



ZM24054-2




Suitable for Laminat flooring/MFB floor

EIR ZM24054 SERIES

LENGTH:1217MM
WIDTH:197,238MM
THICKNESS:8,10,12MM



ZM24054-3

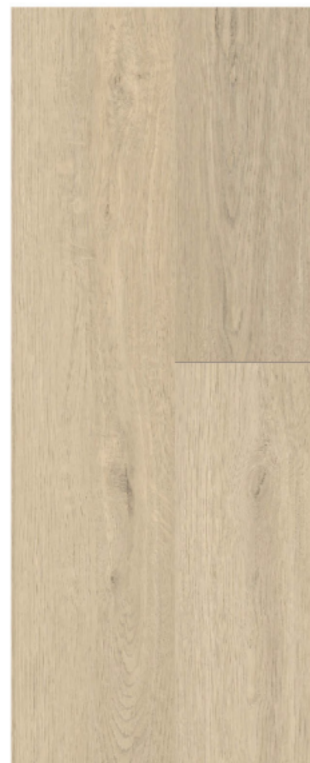

ZM24054-4



ZM24054-9



ZM24054-10



Suitable for Laminote flooring

**Pressed Ugroove
EIR ZM515046 SERIES**

LENGTH:1515MM
WIDTH:238MM
THICKNESS:10,12MM



ZM515046-1



ZM515046-2



ZM515046-3



ZM515046-4



ZM515046-5



Suitable for Laminate flooring

Pressed U groove
EIR ZM2410 SERIES

LENGTH: 1515MM
WIDTH: 238MM
THICKNESS: 10, 12MM



ZM2410-1



ZM2410-2



ZM2410-3



Suitable for Laminate flooring

Pressed U groove
EIR ZM2409 SERIES

LENGTH: 1515MM
WIDTH: 238MM
THICKNESS: 10, 12MM



ZM2409-1

ZM2409-2

ZM2409-3

ZM2409-4



ZM2409-5



ZM2409-6



ZM2410-4



ZM2410-5




ZM2410-6



ZM2410-7

MFB Flooring Structure

There are 4 layers in MFB flooring structure;

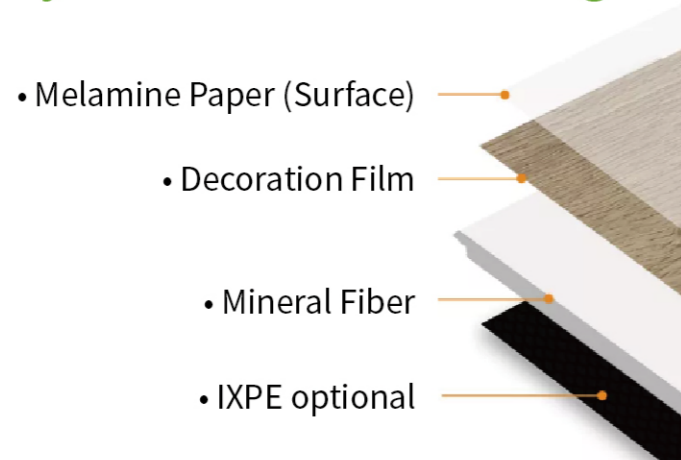

MFB FLOOR

Being proud of its PVC-free

MFB, mineral fiber board flooring, it is the most innovative waterproof flooring and has the most stable performance. The MFB is a new technology material composed of silicate plant fiber and inorganic cemented composite materials. The rigid tensile layer is to balance the full MFB plank and make the planks flat and straight. The MFB flooring has outstanding advantages including dimensional stability, 100% water-proof, PVC free, excellent abrasion-and-stain-resistance, super scratch resistance, cigarette burning resistance, degradable and environmental-friendly. As a household product, the MFB flooring achieves E0 formaldehyde emission.



Extraordinary Abrasion Resistance

The innovative technical treatment of the MFB flooring, in a specific high-temperature and high-pressure environment, with the addition of special metallic silicate components as a surface coating, results in a new type of flooring with exceptional wear resistance, which



Excellent Stain Resistance

The MFB flooring has a special metal silicate component with unique tightness. The surface molecular structure can effectively prevent oil contamination or penetration due to the UV and resin coating compared to the traditional flooring. It can be cleaned with a simple wipe.



Corrosion Resistance

The Dachuan MFB flooring is made of special high-quality polymer materials that make it resistant to a wide range of chemical agents.




100% Waterproof

The MFB flooring is the most innovative waterproof flooring due to its tight-fit structure, makes it applicable for indoor and outdoor usage.


Bamboo Charcoal Wall Panel

PRODUCTION

The base material is mixed with medical grade PVC resin and bamboo wood fiber, using PUR hot melt adhesive, automatic hot coating technology and high temperature pressing. It has the advantages of moisture-proof, insect and termite proof, and convenient installation. The blank wall is directly installed, and the old renovation can be moved after renovation.

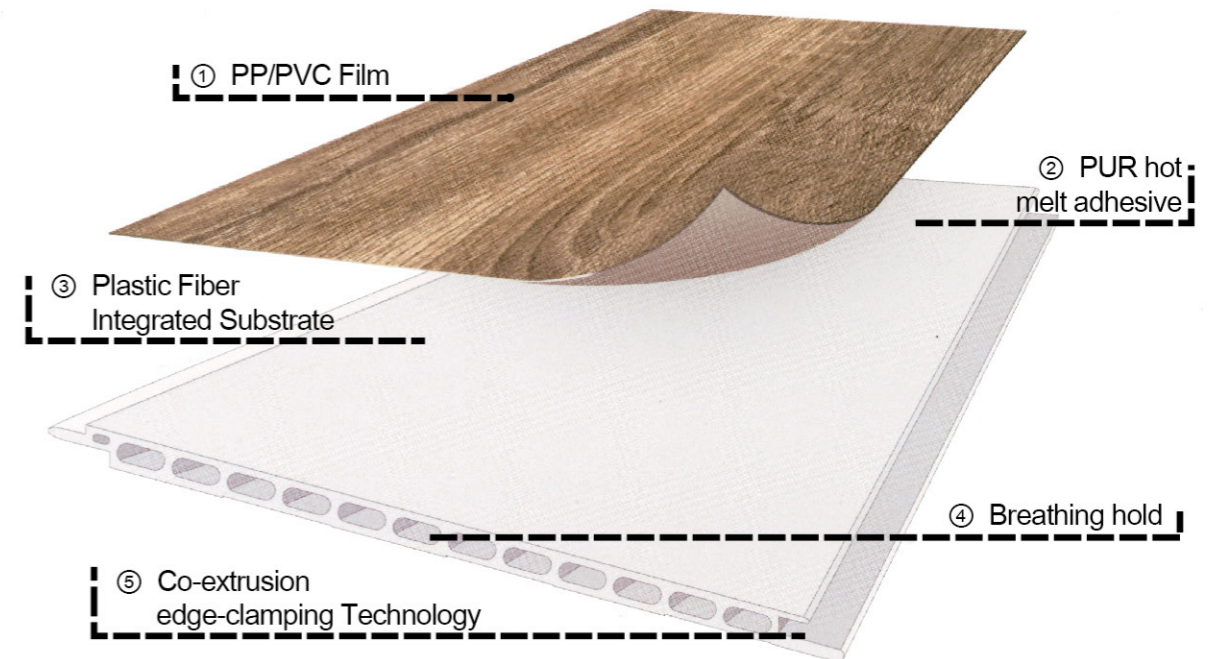


PRODUCT FEATURES




Eco-friendly material




Waterproof And Moisture-Proof



Termites And Insects Proofing



Fire Resistance (B1 Level)



Anti-bending And Durable



Easy for Installation

Widely used in home decoration, bedroom, living room background; Tooling is used in hotels, health homes, commercial places, offices and other public areas.

SAMPLE PROJECT



SIZE
Width:400/600MM
Length:2800MM/3000MM
Thickness:9MM



Carbon Crystal Wall Panell



One board to the top, let the space more bright and spacious

The combination of carbon fiber polymer base material. Solid core plate, substrate flatness is good, high strength is not easy to deformation, waterproof and moisture-proof, the use of prefabricated card groove structure, the installation is faster, The surface can be coated with PET high light film and a variety of decorative film, 1.2 meters width, to meet a variety of fashionable design styles




Products are suitable for hotels, villa clubs, restaurants, sales center, office buildings and other commercial places wall decoration.

STRUCTURE DIAGRAM

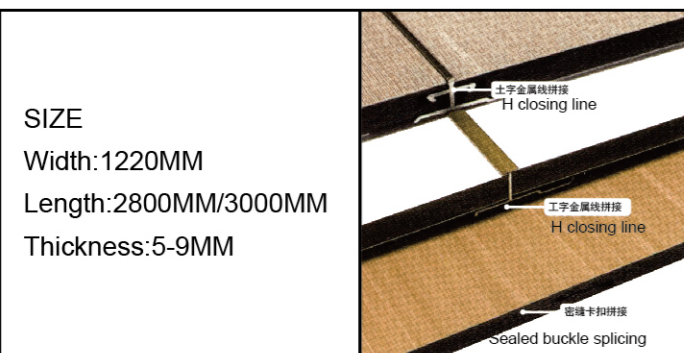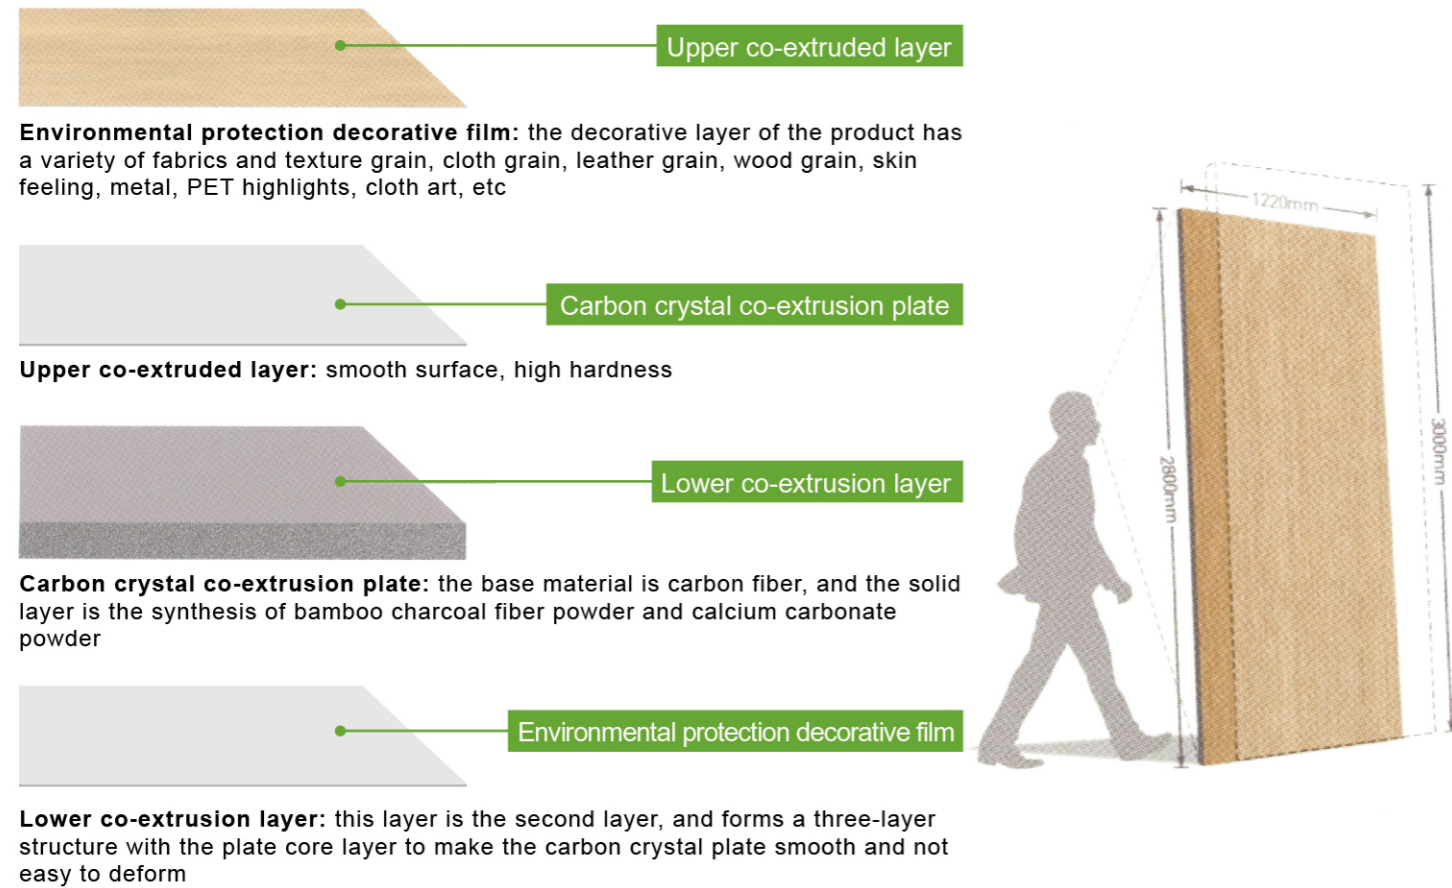


Color display


METAL FILM SERIES

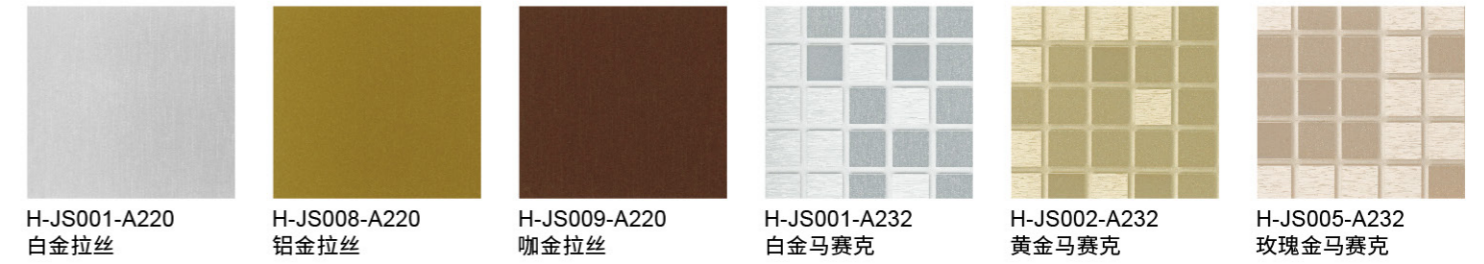

SKIN SERIS

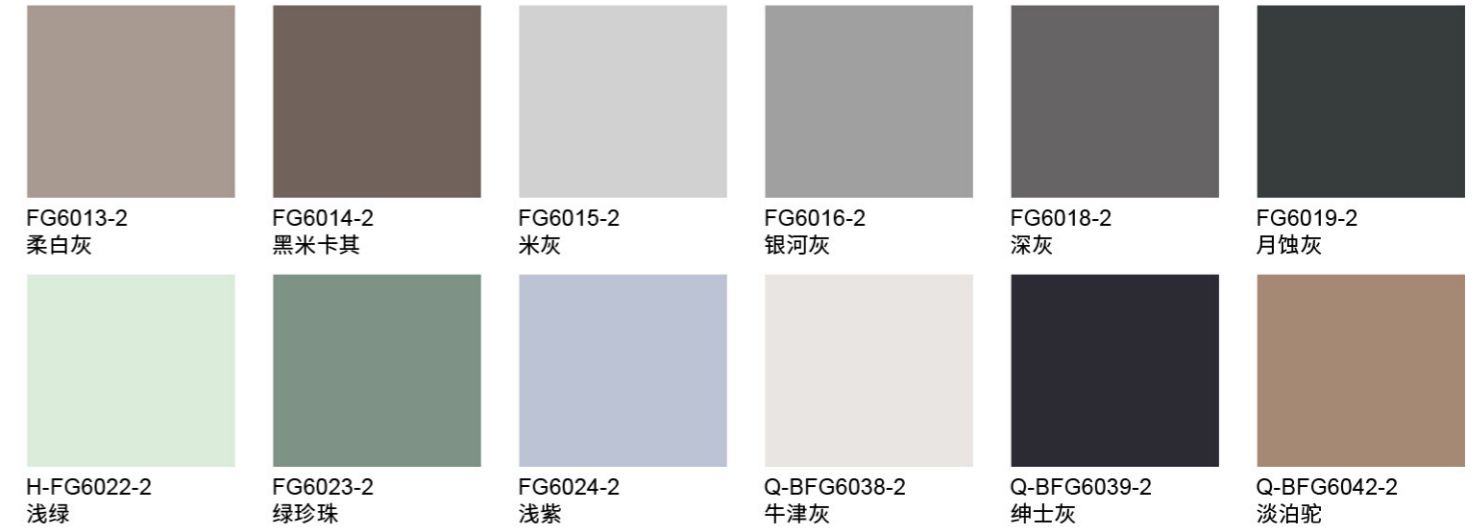

PET

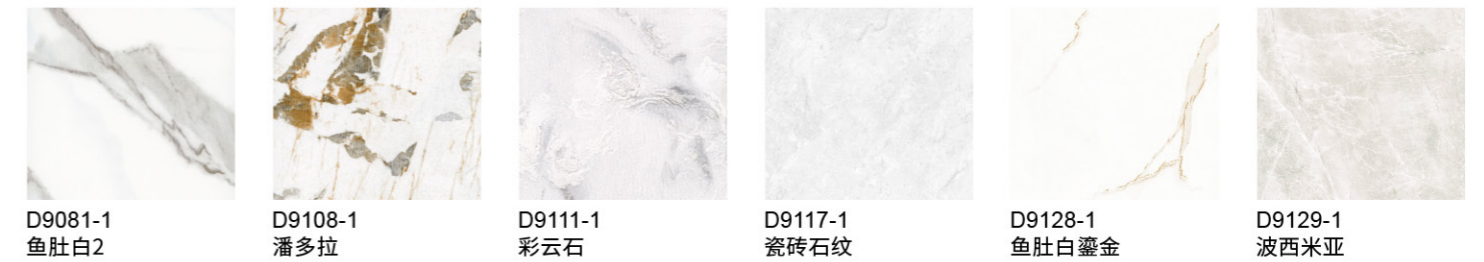

GRAIN




Acoustic Wall Panel

Structure:

Base material:
panel of PET fibers

Slats:
MDF-black

Surface:
Laminate

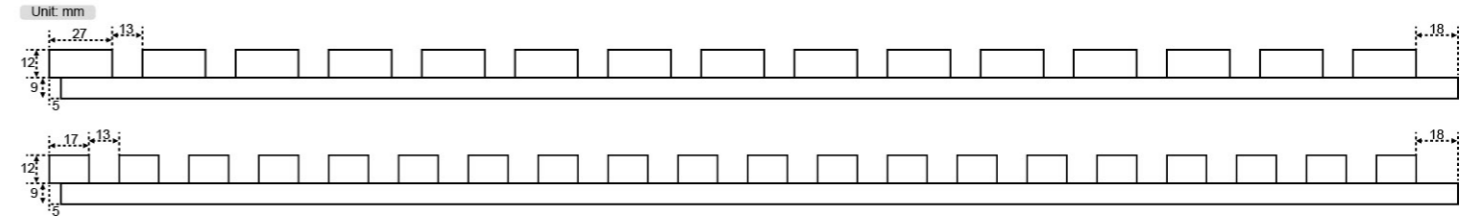

Product display



SIZE: 2700*520*18MM (106" × 21")

Effective noise reduction

Sound-absorbing felt mitigates noise and reduced unwanted reverberations.

Flame retardant


The black acoustic felt can achieve B1 grade flame retardancy.

Rich in color and shape

Versatile woodgrain colors and finishes to appeal to any style of home or office.

Environmental protection

CARB P2 grade medium density fiberboard protects from harmful gases and compounds.

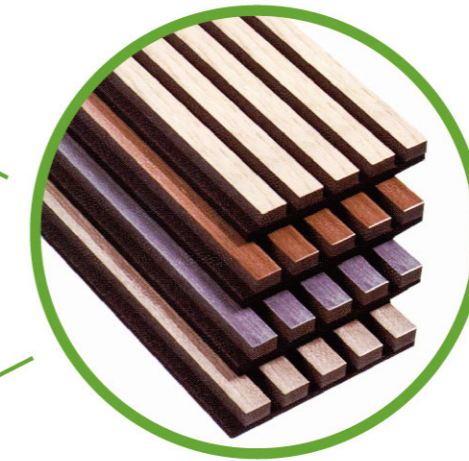

Base material

Consisting of PET fibers with a recycling rate of up to 60% (recycled PET bottles)






Noise absorption




CLASSICAL LOUVERED PANELS



Aluminum Accessories

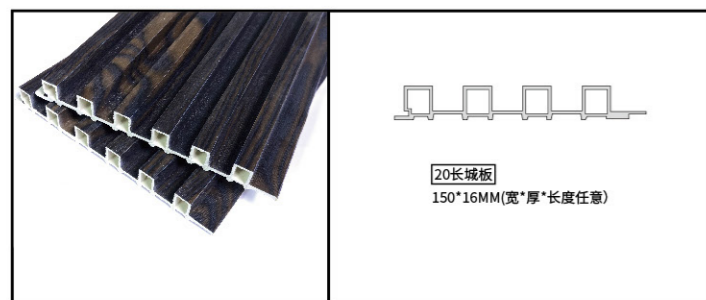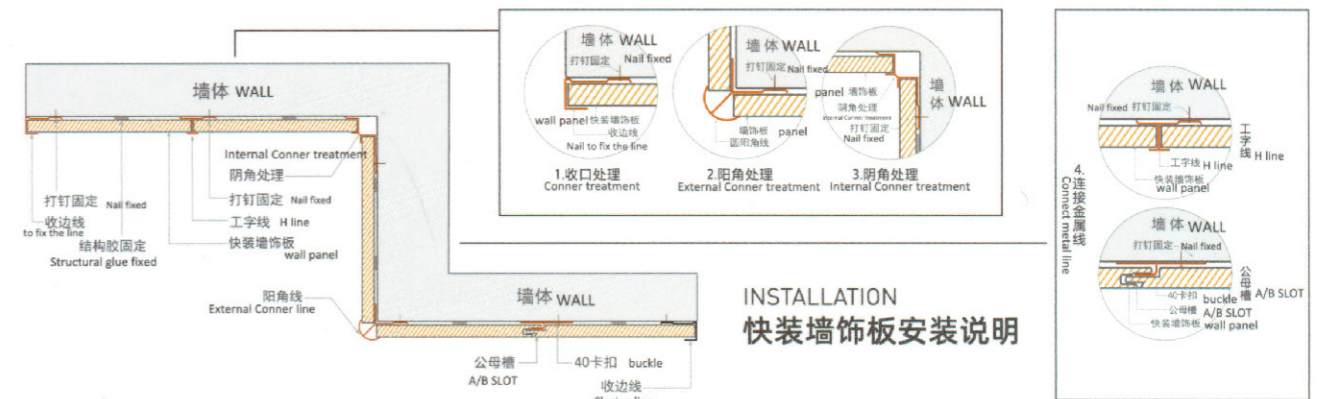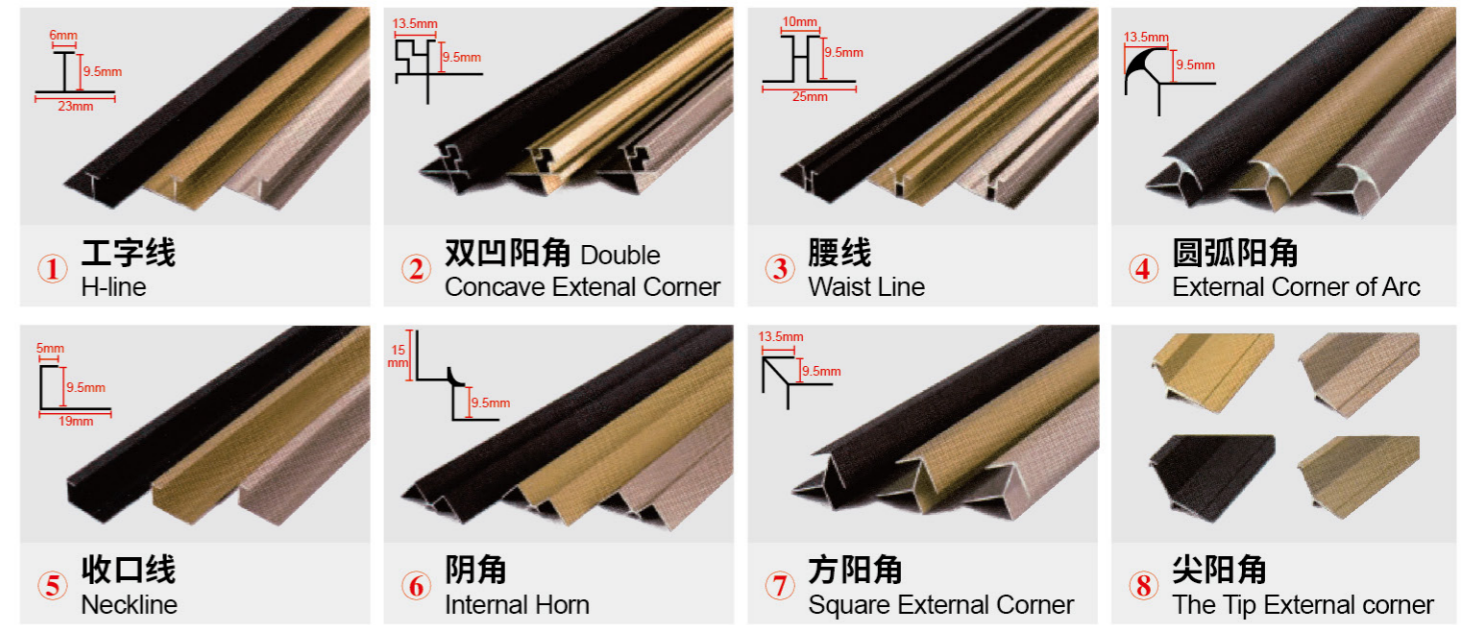

150×16MM(Width×Thickness, Random Length)

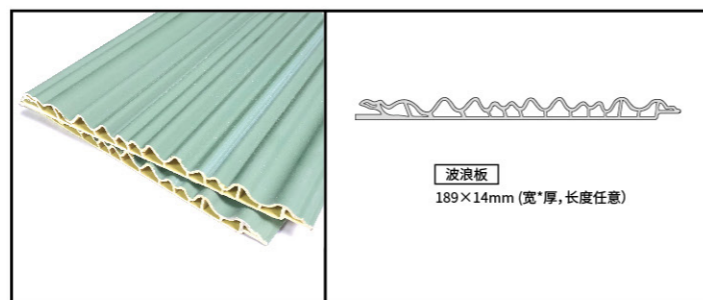

189×14mm(Width*thickness, Random length)

